


TGD-A2 SERIES 90° HYBRID AND COMBINER

P/N:TGD-A2021

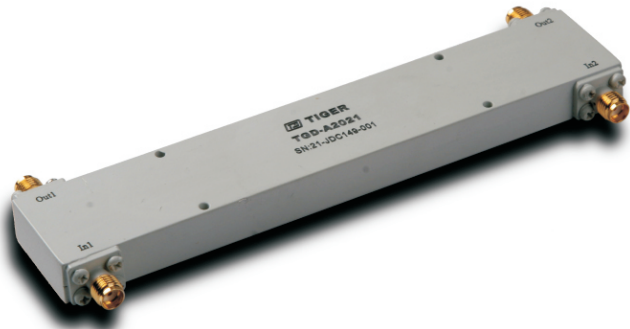

FEATURES AND APPLICATION:

TGD-A2 series 90° hybrid adopts strip line structure, it gets low insertion loss, high isolation, good amplitude and phase accuracy, and high power handling.

TGP-A2021 broad band 90° hybrid is mainly used for communication, EW, radar, navigation, identifying, measuring and testing fields, combining power, antenna and feed network, splitting orthogonal power.

“HYBRID APPLICATION DIRECTORY TG6205001C” should be as reference. The series can be customized according to customer’s needs.

TECHNICAL SPECIFICATIONS:


Frequency Range	Insertion Loss	Isolation	VSWR	Amplitude Balance
0.8-3GHz	0.80dB	20dB	1.30	±0.7dB
Phase Balance	Connector	Power Handling		
±5°	SMA-F	50W		

ENVIRONMENTAL PARAMETERS:

WORKING TEMPERATURE: -55~+85°C


STORAGE TEMPERATURE: -55~+100°C

OUTLINE: $\frac{\text{mm}}{\text{(inch)}}$

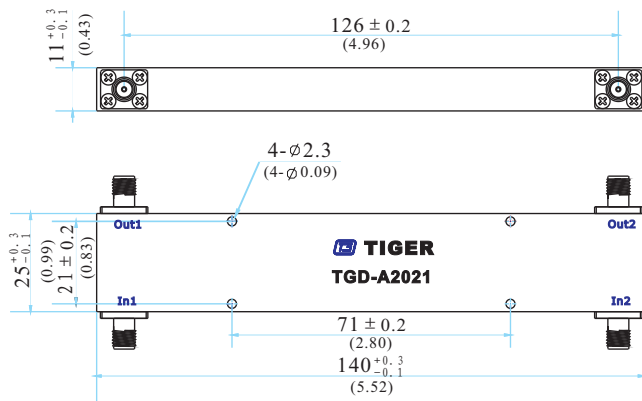


TYPICAL PLOT:


Insertion loss

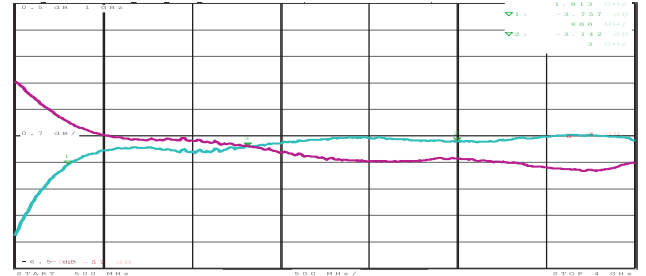


Isolation

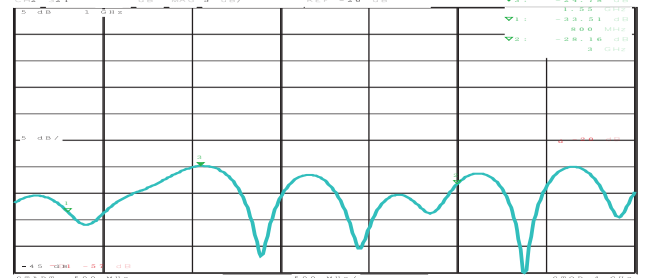

Phase Balance

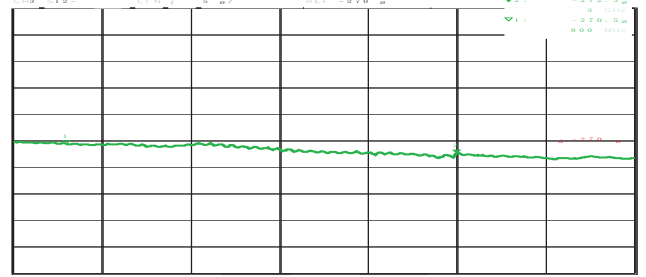

VSWR(input)

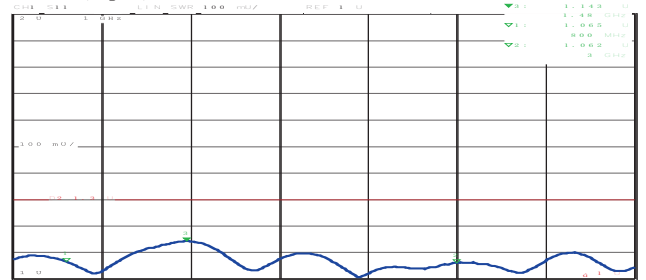

VSWR(output)

