

# TGD-A1 SERIES DIRECTIONAL COUPLER

P/N:TGD-A1201-30



## FEATURES AND APPLICATION:

TGD-A1 series directional coupler covers frequency 0.5-18GHz with SMA connector. Adopting strip line on circuit, it gets low insertion loss, high directivity and high power handling. The termination is interior located for using convenience.

TGD-A1201 broadband directional coupler mainly is used for EW, radar, communication, navigation, measuring and testing fields, sampling and monitoring signal and splitting and combining uneven power. There are diverse coupling at choice.

The series is Tiger's standard product and can be customized according to customer's needs.

## TECHNICAL SPECIFICATIONS:


Frequency Range	Insertion Loss	Coupling	VSWR	Directivity	Amplitude Balance
0.8-2.5GHz	0.4dB	30±1dB	1.2	20dB	± 0.70dB
Connector	Power Handling				
SMA-F	50W				

## ENVIRONMENTAL PARAMETERS:

WORKING TEMPERATURE: -55~+85°C


STORAGE TEMPERATURE: -55~+100°C

## OUTLINE: $\frac{\text{mm}}{\text{(inch)}}$

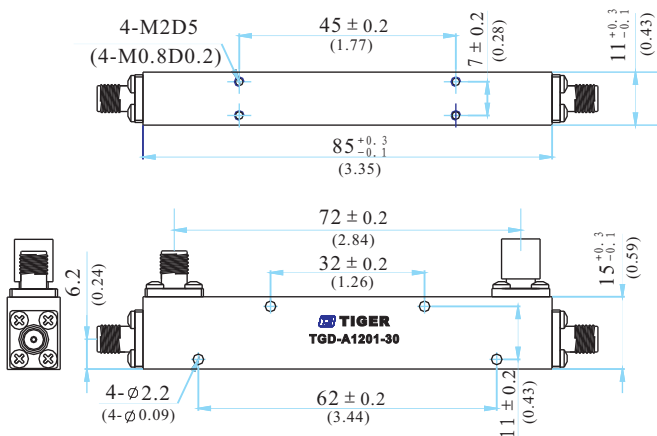


## TYPICAL PLOT:


### Coupling

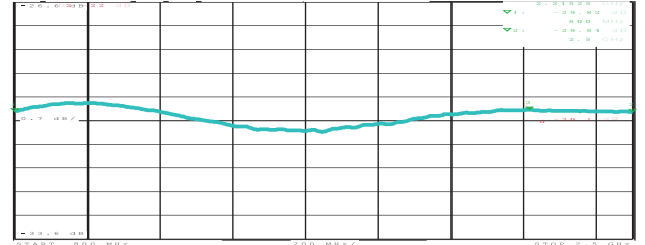

### Isolation

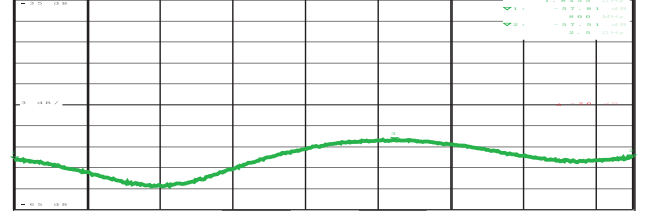

### Insertion loss

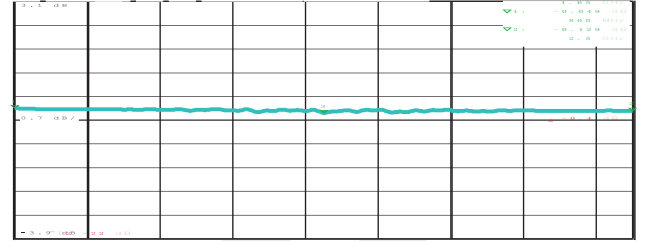

### VSWR

